

INSTRUCTION MANUAL

Existing Bollard Safety Net - Standard Rings

by US Netting

The **Existing Bollard Defender Net** with standard ring arrives boxed up and ready to go with everything included. Congratulations on making your loading dock the safest in the world!



Shipment Breakdown:

- 8 - Standard Rings
- 24 - Set Screws
- 24 - Nuts
- 8 - Eye Bolts
- 1 - Black sharpie marker
- 1 - Polyester Safety Net
- 1 - Allen Wrench

* Note : Set Screws, Nuts, and Eye Bolts come installed in each of their respective rings.



Required Tools:

- Crescent Wrench
- Tape Measure
- Marker or Pencil for Marking
- Allen Wrench (included)

Correctly Installed Existing Bollard Safety Net

Visit www.usnetting.com/the-path-to-the-install-video**** to view a step-by-step video guide.

INSTRUCTIONS:

1. Clean your existing bollards and remove any excess paint or debris that will block the ring.
2. Slide your first ring over the bollard and position the ring.
*** Take Note of the Eye Bolt Position to stay consistent with the other eye bolts*
3. Use the supplied Allen Wrench(key), tighten the set screws evenly to hold the ring at its current height.
4. Use a crescent wrench to tighten the stopping nut to keep the set screw from backing out. Hand-tighten the eye bolt, so it butts up against the existing bollard as well. Your ring should be snug at this point.
5. Measure from the floor to determine the height of the ring for placement on the opposite side. Bollards aren't created equal so not every install is the same and positioning may vary.
6. Slide the next ring onto the bollard, repeat steps 3 through 5.
***Be sure to take note of the location of the ring on the bollard based on the first installed ring*


7. To secure all the remaining standard rings, repeat steps 2-5 until all rings are on the bollard.

8. Use your measurements on the opposite side bollard to install the remaining four rings.

*** Use steps 2-6 until all rings are installed*

9. Attach your safety net and tighten the cam buckles to secure and tighten your safety net in between the two bollards.

10. Use the extra webbing straps to adjust the positioning of the safety net. Adjust the heights of any of the rings to make the net level by loosening set screws and eyebolts and moving up or down.

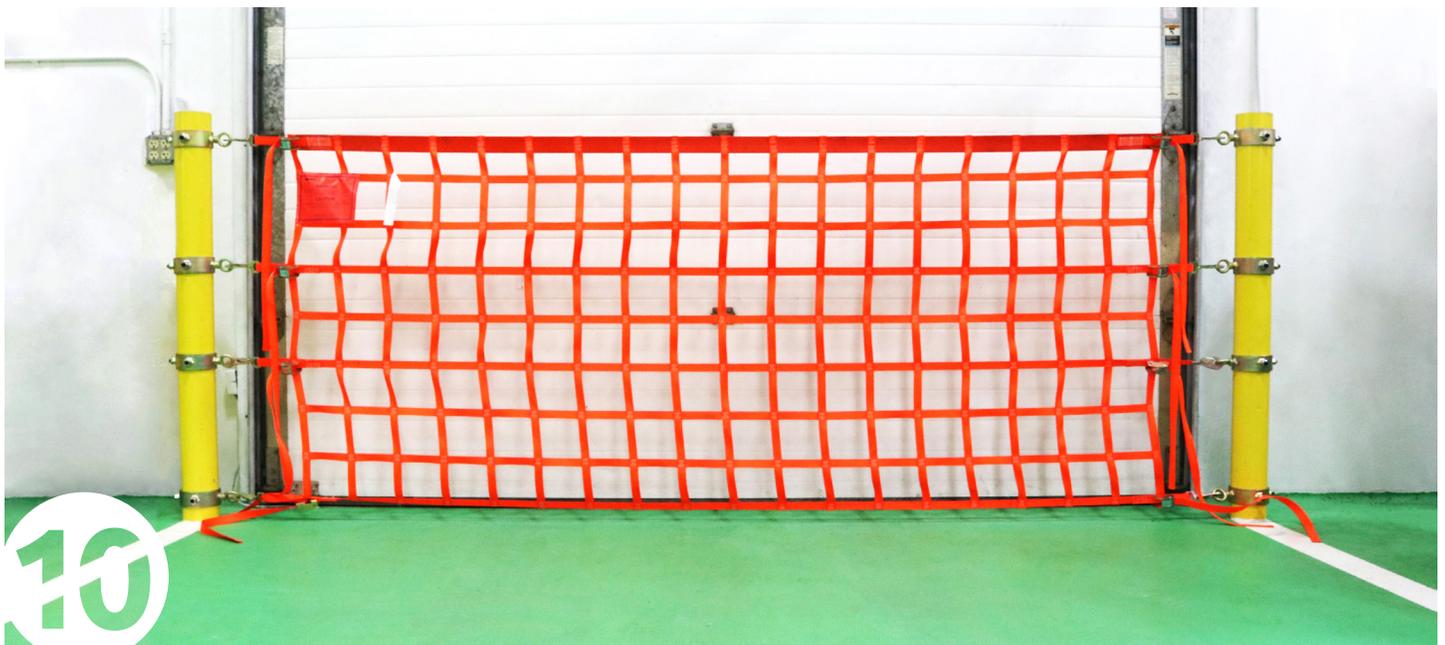



DEFENDER  GATE
SAFETY BARRIER SYSTEMS
1-800-331-2973 | www.usnetting.com